ENERGETIC LIGHTING

Project:		Catalog #:		Type:	
Prepared by:		Notes:		Date:	

SLA Series

LED Strip Light Fixture
CCT&Wattage-Selectable ▪ 4-ft & 8-ft options

KEY FEATURES

- Compact and narrow design allow for various applications and use cases
- EZCCT field-selectable CCT - 3500K, 4000K & 5000K @ >80 CRI
- EZWATT field-selectable wattage allow option for reduced wattage for greater energy savings
- Energy efficient up to 130 lm/W
- Separate backplate housing for easy keyhole mounting
- Suitable for dry or damp location installations
- Dimmable down to 10% with 0-10v input standard
- Optional motion sensor or battery backup available
- Available in 4-ft and 8-ft options

Highlights

Hands-free support cable on inner LED plate speeds up installation time and effort



Conduit knockout options available on both ends (1/2" and 1/4" trade-sizes) as well as three 1/2" locations on back plate

Matching white junction box faceplate available to cover up exposed opening

Energetic Lighting's ezCCT and ezWatt feature allow user-selectable color temperature and wattage

Accessible inner wiring compartment tray for easy wire routing without light path interference

Load Information

Input Voltage	120-277Vac	
Power Factor	0.9	
THD	20%	
Low Temp Start	-25°C (-13°F)	
Max Temp	45°C (113°F)	
Unit Weight	4-ft profile	3.5 LBS
	8-ft profile	6.4 LBS

Shipping Information

Item	Weight	Box Qty.
4-ft profile	tba lbs	6 per
8-ft profile	tba lbs	6 per

Lumen Maintenance

Ambient Temp	TM-21 Lumen Maint. (50,000 hours)	Theoretical L70 (hours)
25°C	>70%	50,000

Dimensions

4-ft profile
SLAM4NS52SE83550

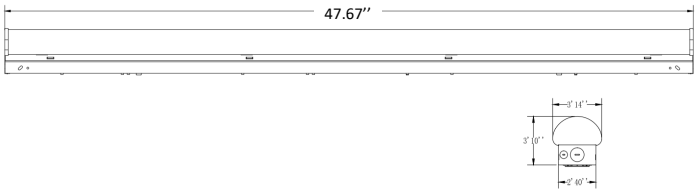

8-ft profile
SLAM8NS104SE83550

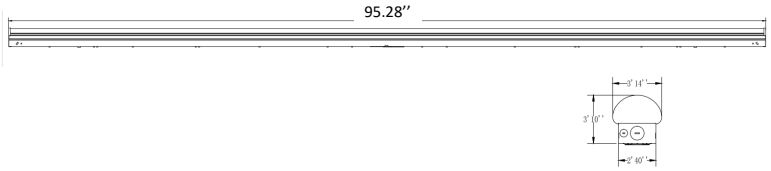

Energetic Lighting
13445 12th Street, Chino, CA 91710 | TEL: 866-492-6566 909-591-2345 | FAX: 909-591-2448
E-mail: info@energeticlighting.com | www.energeticlighting.com

Specifications are subject to change without notice.
All values are nominal or typical values, measured under laboratory conditions @ 25° C.
Actual performance may vary slightly as a result of end-user environment/application.

ENERGETIC
LIGHTING

SLA Series

LED Strip Light Fixture
CCT&Wattage-Selectable ▪ 4-ft & 8-ft options

Specifications

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temperature	CRI	Voltage	Dimming	Certifications	Pallet Qty
SLAM4NS52SE83550	30214	5200 | 4550 | 3900 selectable	40 | 35 | 30 selectable	130	3500K, 4000K, 5000K selectable	80	120-277Vac	0-10v	ETL, DLC	TBA
SLAM8NS104SE83550	30215	10400 | 9150 | 7800 selectable	60 | 70 | 80 selectable	130	3500K, 4000K, 5000K selectable	80	120-277Vac	0-10v	ETL, DLC	TBA

NOTES:

Specifications are subject to change without notice.
All values are nominal or typical values, measured under laboratory conditions @ 25° C.
Actual performance may vary slightly as a result of end-user environment/application.